BI-METALIC TEMPERATURE GAUGES

(Industrial Thermometer, All SS)


Specifications


Dial Size	:	100, 150, 200, 250 mm
Range	:	-38 to +50, -50 to 50, 0 to 50, 100, 120, 150, 200, 250, 300, 400, 6000C
Units	:	D.C.
Accuracy	:	± 1% FSD as per EN 13190
Overrange	:	130% F.S.
Connection	:	1/2" BSP / NPT, M20 x 1.5
Case Material	:	SS 304 Bayonet Bezel
Stem Material	:	SS 316
Stem Dia	:	8 mm
Dial	:	Aluminum, black graduation on white background
Immersion Length	:	Adjustable upto 300 mm
Protection	:	IP 65 / IP 67
Mech. Shock "G" Value	:	15 G, 6 msec
Storage Tempearture	:	-20 D.C. to 60 D.C.
Windows	:	Shatterproof Glass
Zero Adjustment	:	Micrometer Pointer, Zero Adjustable Type
Mounting	:	Direct Mounting Bottom Entry Direct Mounting Back Entry Bottom / Back Every Angle Type
Accessories	:	Thermowell




Special Features

- Designed to fulfill most industrial requirements.
- Compliance to latest EN-13190 standard.
- Stem length available from 75 mm to 2000 mm.
- Unit of measurement - D.C. / Fernite Scale
- Micrometer pointer.
- IP 65 / IP-67 Protection.
- Thermowell : Fabricated, Bar Stock, Flanged Type.

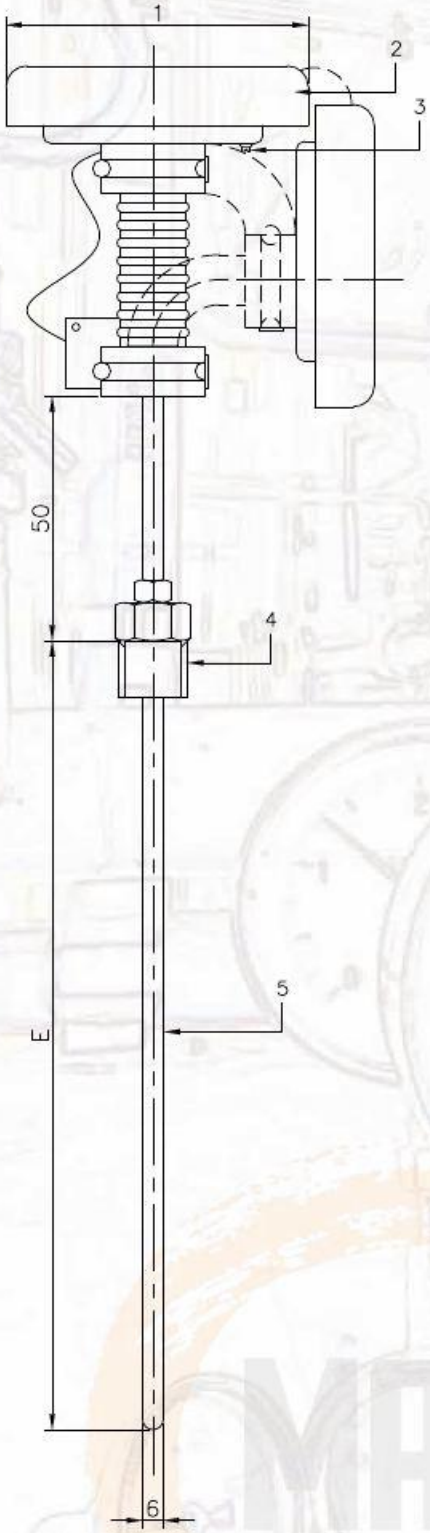

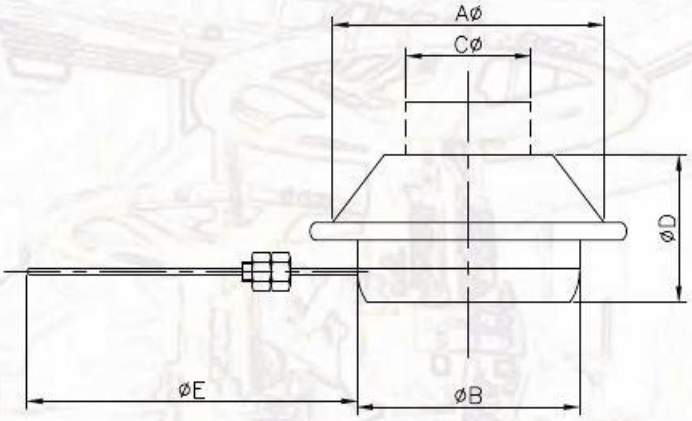

THERMOWELL (FLANGED TYPE)

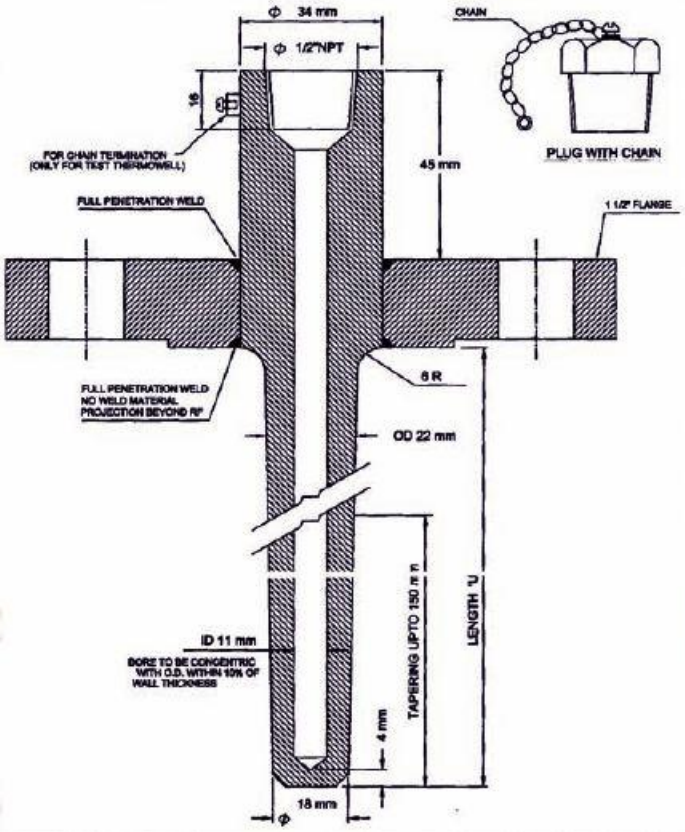

THERMOWELL

